

INDUSTRIAL CYLINDER HEATED DRYING IRONERS

I
RANGE

IR 50

IF 50

500MM

500MM



COMPACT
DESIGN



EASY
OPERATION



OPTIMIZED
OUTPUT

senso-speed

EASYFOLD

FEATURES

- Large surface contact with linen over an angle of 3000
- Finger protection and emergency button for more safety
- Durable Meta Aramid ironing belts
- Automatic cooldown
- Easy to operate microprocessor: 20 pre-set ironing programmes
- Indication of ironing speed and temperature
- Reverse mode possible
- IR model: front and rear output troughs
- IF model: front output table

- Variable setups for folding (IF)
- IF model: integrated length folder model
- Frequency-controlled motors
- Easy to remove lint filters
- Standard anti-static bar (IF)
- Easyfold® system requires less maintenance (no ribbons and rolls)
- Electric, gas or steam heating

OPTIONS


- Foot pedal for easy stop and start operation
- Rear output table (IF)
- Chrome-plated cylinder for a better thermal conduction

GET AHEAD IN LAUNDRY



PT. TRIGLOBAL MANDIRI INDONESIA
Laundry Machines Contractors and Supplier

TYPE		IF/IR50-200	IF/IR50-250	IF/IR50-320
ROLLER DIAMETER	mm	500	500	500
USEFUL ROLLER LENGTH	mm	2000	2600	3200
HEATING				
Electric heating	kW	38	55	65
Gas heating	kW	36	52	66
Steam heating	kg/h	49	68	88
MOTORS				
Roller motor	kW	0,37	0,37	0,37
Fan motor	kW	0,18/0,255	2x0,18/0,255	2x0,18/0,255
IRONING CAPACITY*				
Electrical & Gas heating	kg/h	80	95	120
Steam heating	kg/h	95	115	145
ROLLER SPEED	m/min.	1,5-8	1,5-8	1,5-8
ELECTRIC CONNECTION		380-415V 3AC+N 50/60 Hz, 208-240V 3AC 50/60 Hz 380-415V 3AC-N 50/60 Hz, 440V-480 3AC 60 Hz		
DIMENSIONS				
H×W×D	mm	1568x2750x1185	1568x3350x1185	1568x3950x1185
Net weight	kg	1290	1440	1680
TRANSPORT DATA				
Volume (packed)	m ³	7,14	8,62	10,13
Packed H×W×D	mm	1900x2890x1300	1900x3490x1300	1900x4100x1300
Gross weight	kg	1520	1700	2000

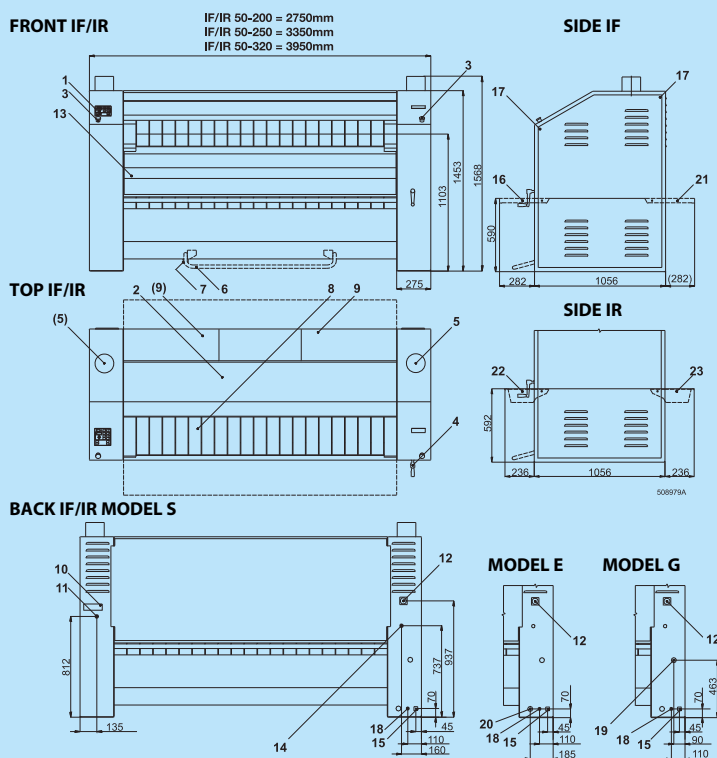

1. Control panel
2. Upper cover
3. Centralstop
4. Manual drive of roller
5. Exhaust ventilation
6. Pedal used for starting/stopping belts movement (according to order, only for version OPL)
7. Pedal microswitch (according to order, only for version OPL)
8. Feeding belts/feeding table
9. Cover of filter sieve
10. Name plate
11. Condense drain G 3/4 (only for version "S")
12. Main switch
13. Upper trough
14. Steam supply G 3/4 (only for version "S")
15. External protective connector
16. Output tilting table - front
17. Bolts of side cover
18. Main supply of electric power
19. Gas supply G 3/4 (only for version "G")
20. Power supply for heating system (only for version "E")
21. Output tilting table - rear (according to order)
22. Output tilting trough - front
23. Output tilting trough - rear

The Primus preserves the right to change the machines and the specification in this leaflet at any time, without prior notice. Details and photographs are only for information and never binding.

www.primuslaundry.com

Primus by Alliance Laundry Systems

