

HIGH EFFICIENT RIGID MOUNTED **INDUSTRIAL WASHER EXTRACTORS**

RX350 RX520

52KG 35KG 80LB 120LB



FEATURES

- Rigid mounted, normal spin,
- Stainless steel top panel & Anthracite grey front and side panels
- Stainless steel drum and tub
- Xcontrol easy to use microprocessor
- Patented Soap Hopper
- High capacity water inlets
- Large drain valves (2ר 76 mm)
- Easy access to all vital parts from the front
- Large door opening for easy loading & unloading

OPTIONS

- Coin or CPS (Central Payment) version
- Stainless steel front and side panels
- USB plug (on the back panel)
- Easy Soap liquid soaps connection
- Liquid soap pumps
- Water recovery kit
- Steam heating version
- 3rd water inlet
























TYPE		RX350	RX520					
INNERDRUM								
Maximum capacity 1:9	kg	37	58					
Capacity 1:10	kg	33	52					
Volume	litres	332	520					
Diameter	mm	914	914					
DRUM SPEED								
Wash	rpm	38	38					
Extraction	rpm	540	440					
G-FACTOR		150	100					
HEATING								
Electricity	kW	27	40,6					
Steam	bar	1 - 8	1 - 8					
Hot water	°C	90	90					
Sound pressure level	dB (A)	< 65	< 65					
Water valves connection	BSP	3/4"	1"					
Water pressure	kPa	100-800	100-800					
Rec. water pressure	kPa	300-500	300-500					
Water inlet	l/min	66-188	183-518					
Drain valve	outer Ø mm	2x76	2x76					
Flow amount with drain valve	l/min	2x210	2x210					
Steam valve connection	BSP	3/4"	3/4"					
Steam pressure	kPa	100-800	100-800					
DIMENSIONS								
Size H×W×D	mm	1500×1060×1030	1500×1060×1315					
Net weight	kg	410	520					
TRANSPORT DATA								
Packed H×W×D	mm	1625×1088×1060	1625×1088×1345					
Gross weight	kg	425	535					

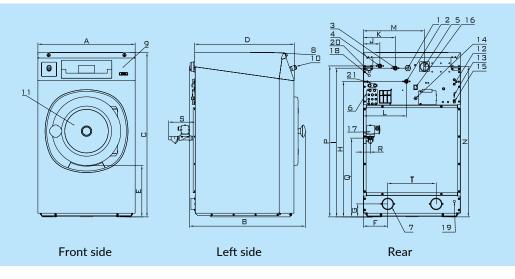

- Electrical connection
- Hot water
- Cold water hard
- Cold water soft
- Main switch
- Liquid soap connection
- Drain
- Soap dispenser Control panel
- 10 Button CENTRALSTOP
- Door opening Ø 504mm
- Fuses
- 13 USB port
- 14 Electrical connection to liquid soap pumps

DIMENSIONS

	Α	В	С	D	Е	F	G	Н	- 1	J	K	L	М	N	Р	Q	R	S	T
RX350	1060	1030	1500	936	465	318	120	1326	1366	113	248	383	671	1349	1413	528	66	145	482
RX520	1060	1315	1500	1221	465	318	120	1414	1374	88	223	363	671	1349	1332	528	66	145	482
	width	depth	height																



